


Three Phase Inverters

XEROX SERIES

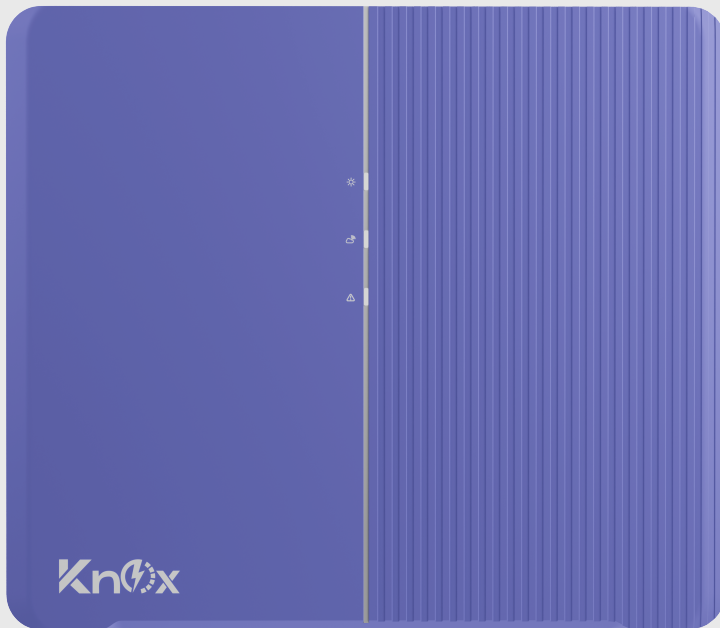

MODEL

G4 10K/15kpV



Easy-to-install

- Quick & easy-to-install with basic tools
- Quick setup and commissioning with Solplanet apps
- Compact wall mount design



Reliable

- International quality standards
- 150 % PV array oversizing for higher yields
- IP66 rated design for outdoor use



User-friendly

- User friendly app interface
- Max 20 A input current, ideal for bifacial and large area PV modules
- Wide MPP voltage range 150V-1000V

PRODUCT MODEL**G4 10K/15KPV****INPUT (DC)**

Max. PV modules power (W)	15000
Max. input voltage (V)	1100
Initial feed-in voltage (V)	180
Min. input voltage (V)	125
Rated input voltage (V)	630
MPPT Voltage Range (V)	150 ~ 1000
Full load DC voltage range (V)	400 ~ 850
Max. DC input current (A)	20/16
Isc PV, Absolute current (A)	30/25
Number of MPPT Trackers	2
Strings per MPPT Tracker	1/1

OUTPUT (AC)

Max. Output apparent power (VA)	11000
Rated Output power (W)	10000
Max. AC Output Current (A)	16.0
Nominal Grid Voltage (V)	230, 3/N/PE
Nominal Frequency (Hz)	50/60
Power factor	0.8 ind ~ 0.80 cap
Topology	non-isolated
Operating temperature range	-25 ~ +60 °C
Degree of protection	IP66